

L-L2 技术参数


产品参数

// _____


额定电压:	220-240V
额定功率:	100-650W
启动装置:	双启动系统 (气压传感+液位浮子传感)
最高扬程:	11m
平排建议:	110m
进水管径:	Φ40mm*3
排污管径:	Φ32mm
马桶接口:	Φ90mm
淋浴抬高:	180mm
启动液位:	80mm
流 量:	125L/Min
转 速:	200-3500转/分钟
污水温度:	1-50℃
防护等级:	整体防护IP65
品质保障:	家用3年 商用18个月
产品尺寸:	464x180x280mm
可增加连接设备:	壁挂坐便器、洗手盆、小便斗、淋浴浴缸、洗衣机、空调、厨房水槽

产品尺寸


// _____

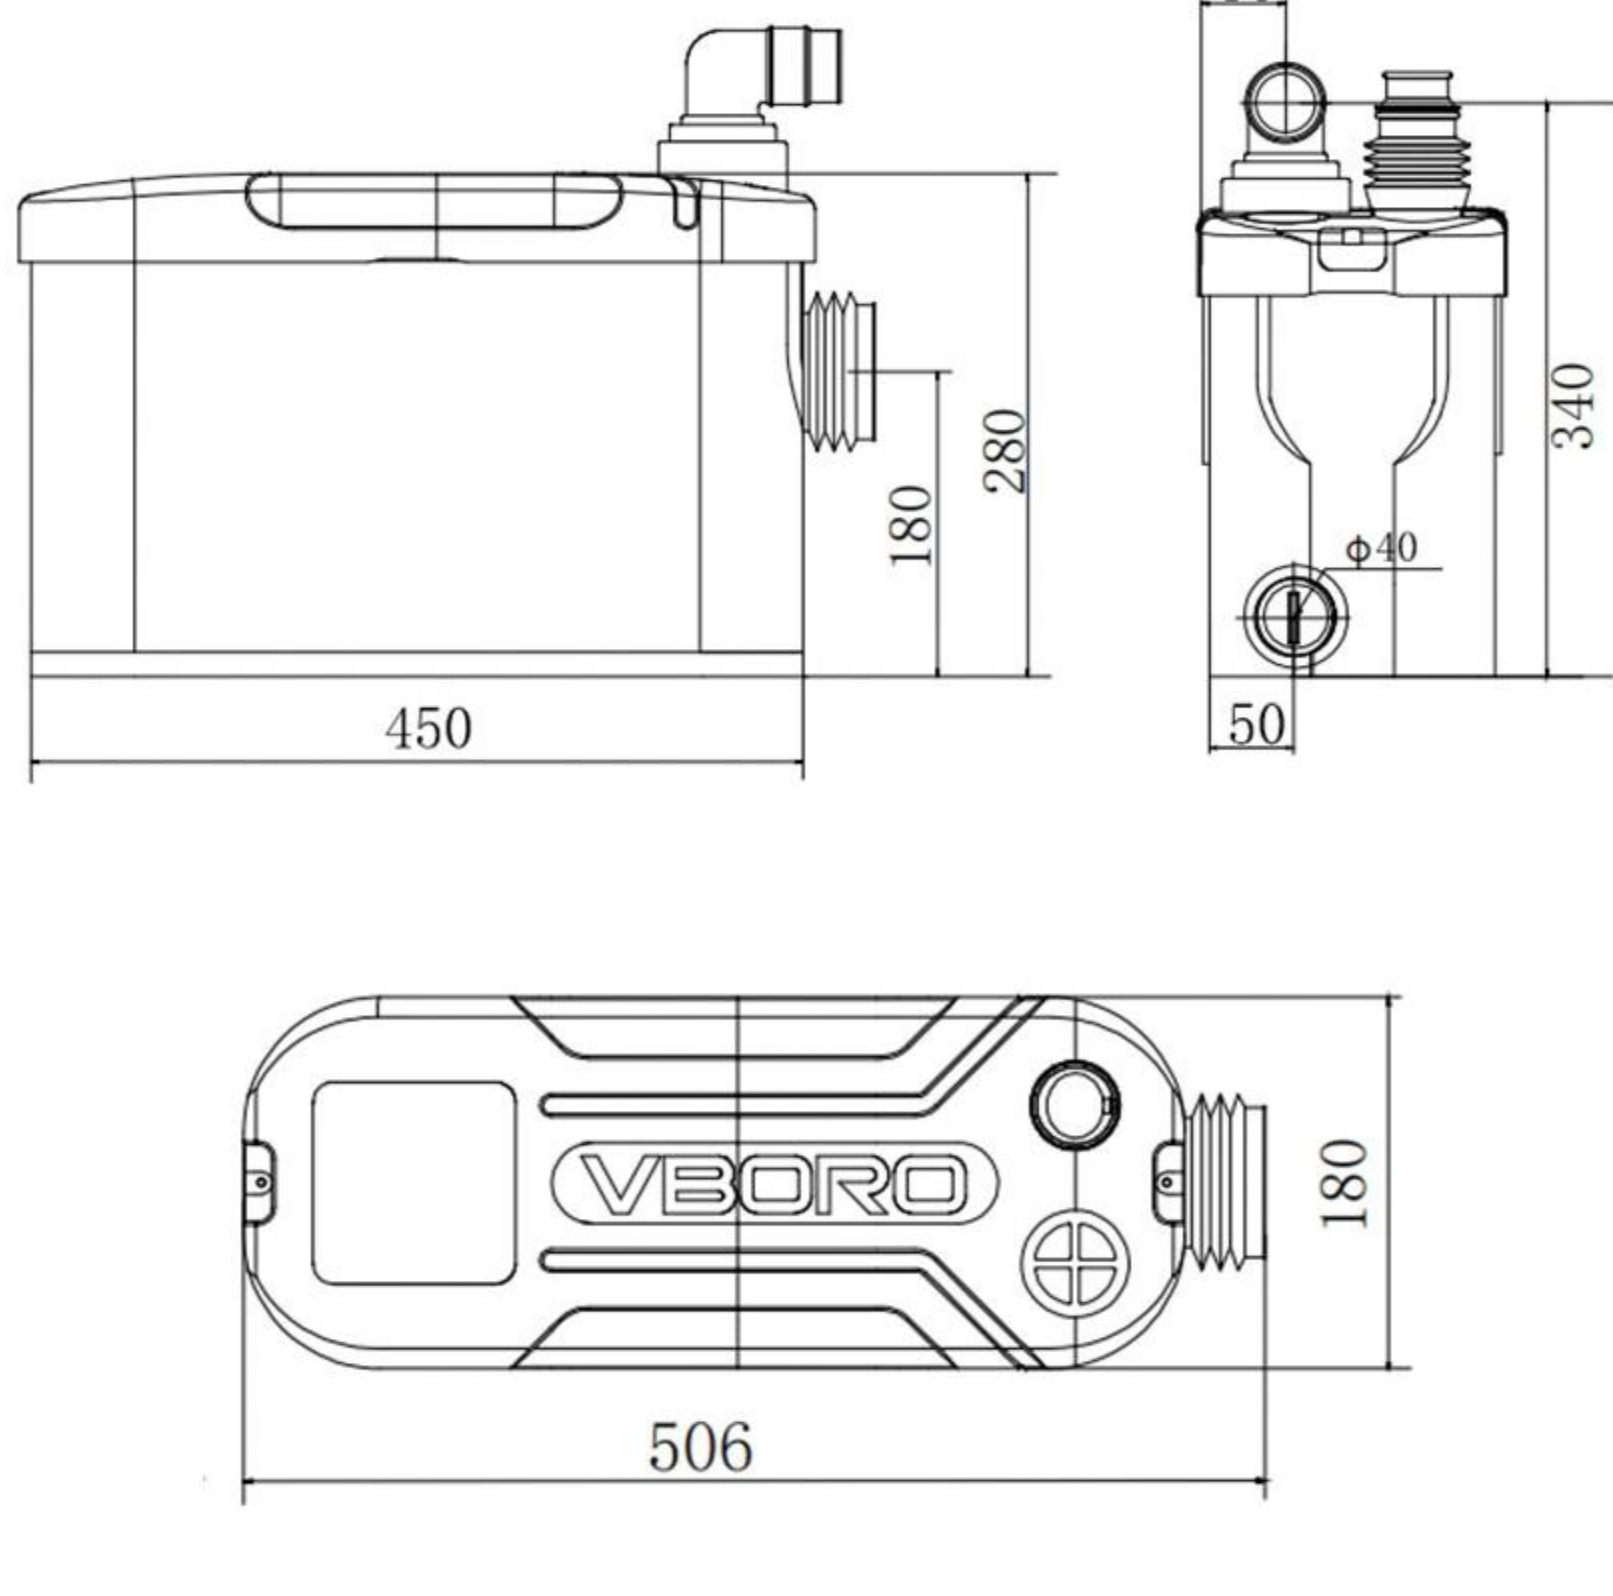

配件清單

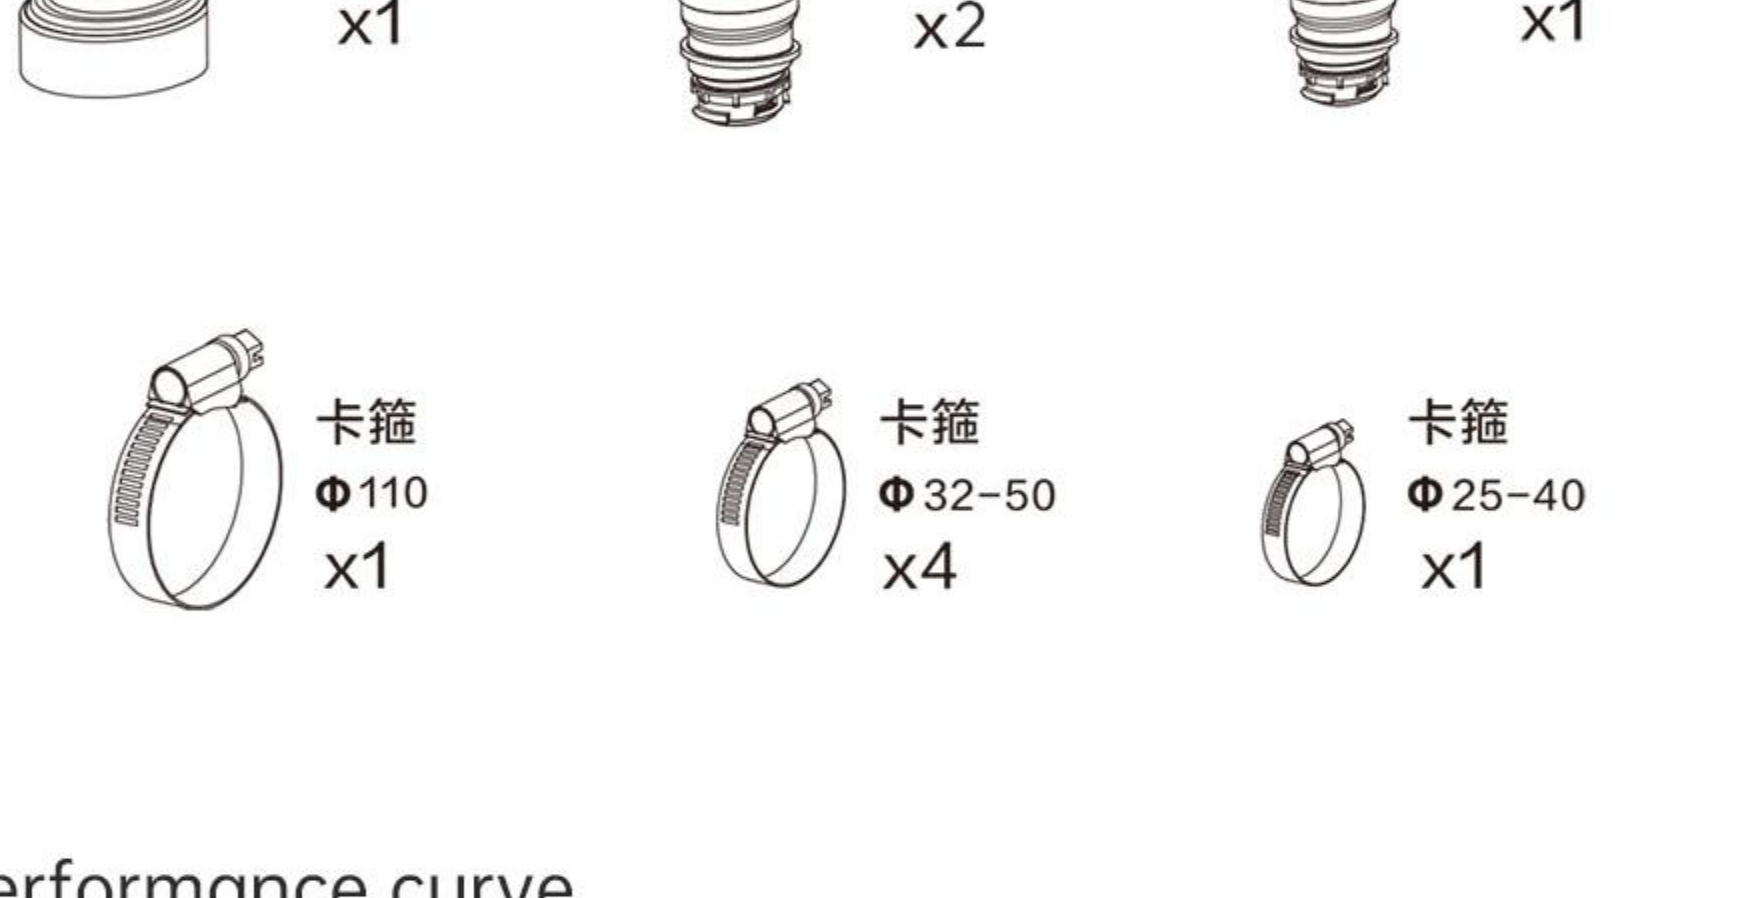

$$H(m) \quad | \quad | \quad |$$

m	$H(m)$
1	11.0
2	11.1
3	11.05
4	11.0
5	10.95
6	10.9
7	10.85
8	10.8
9	10.75
10	10.7

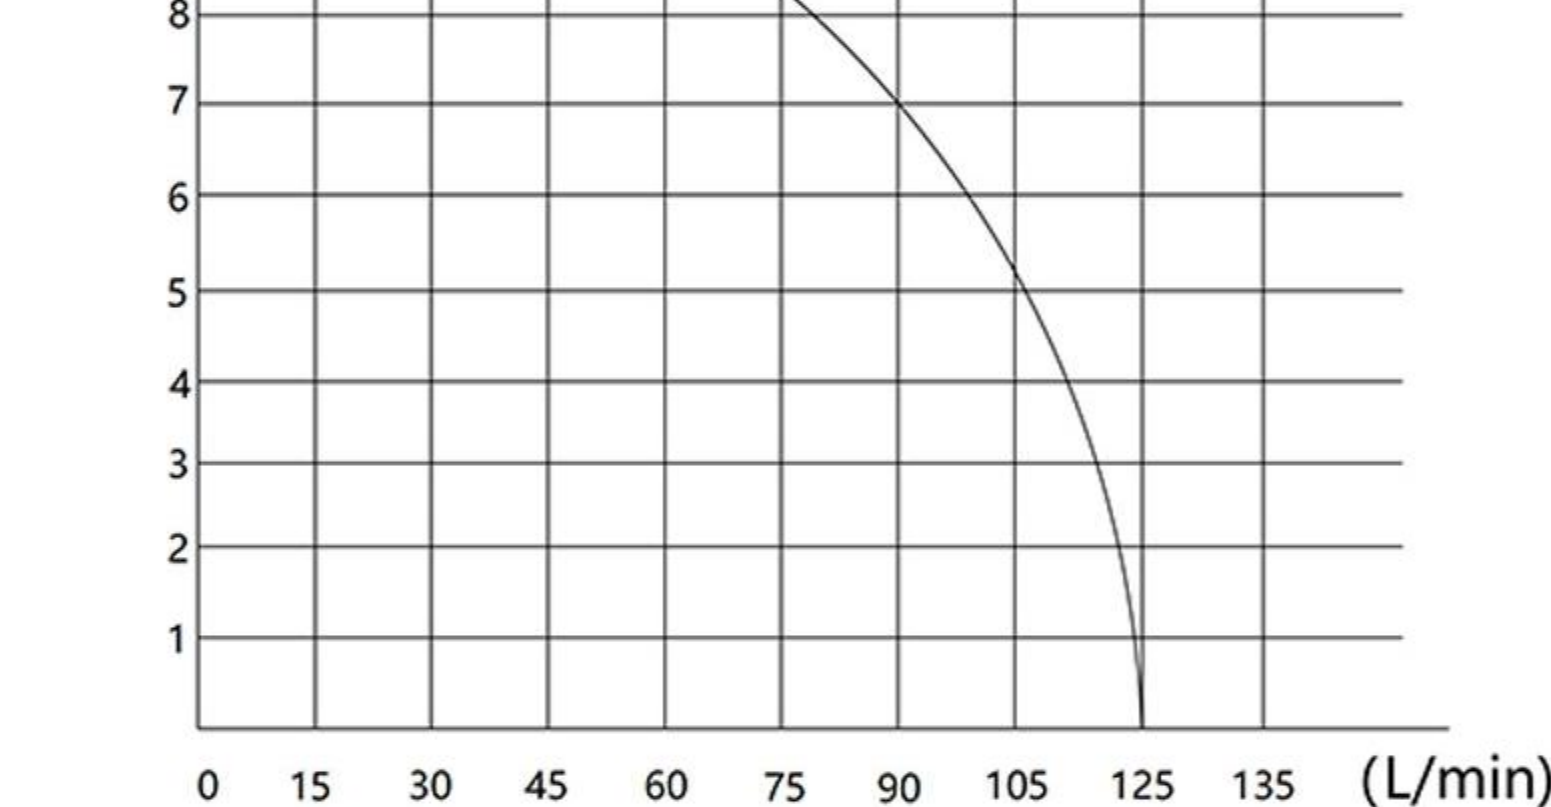

Head diagram
头租图

//

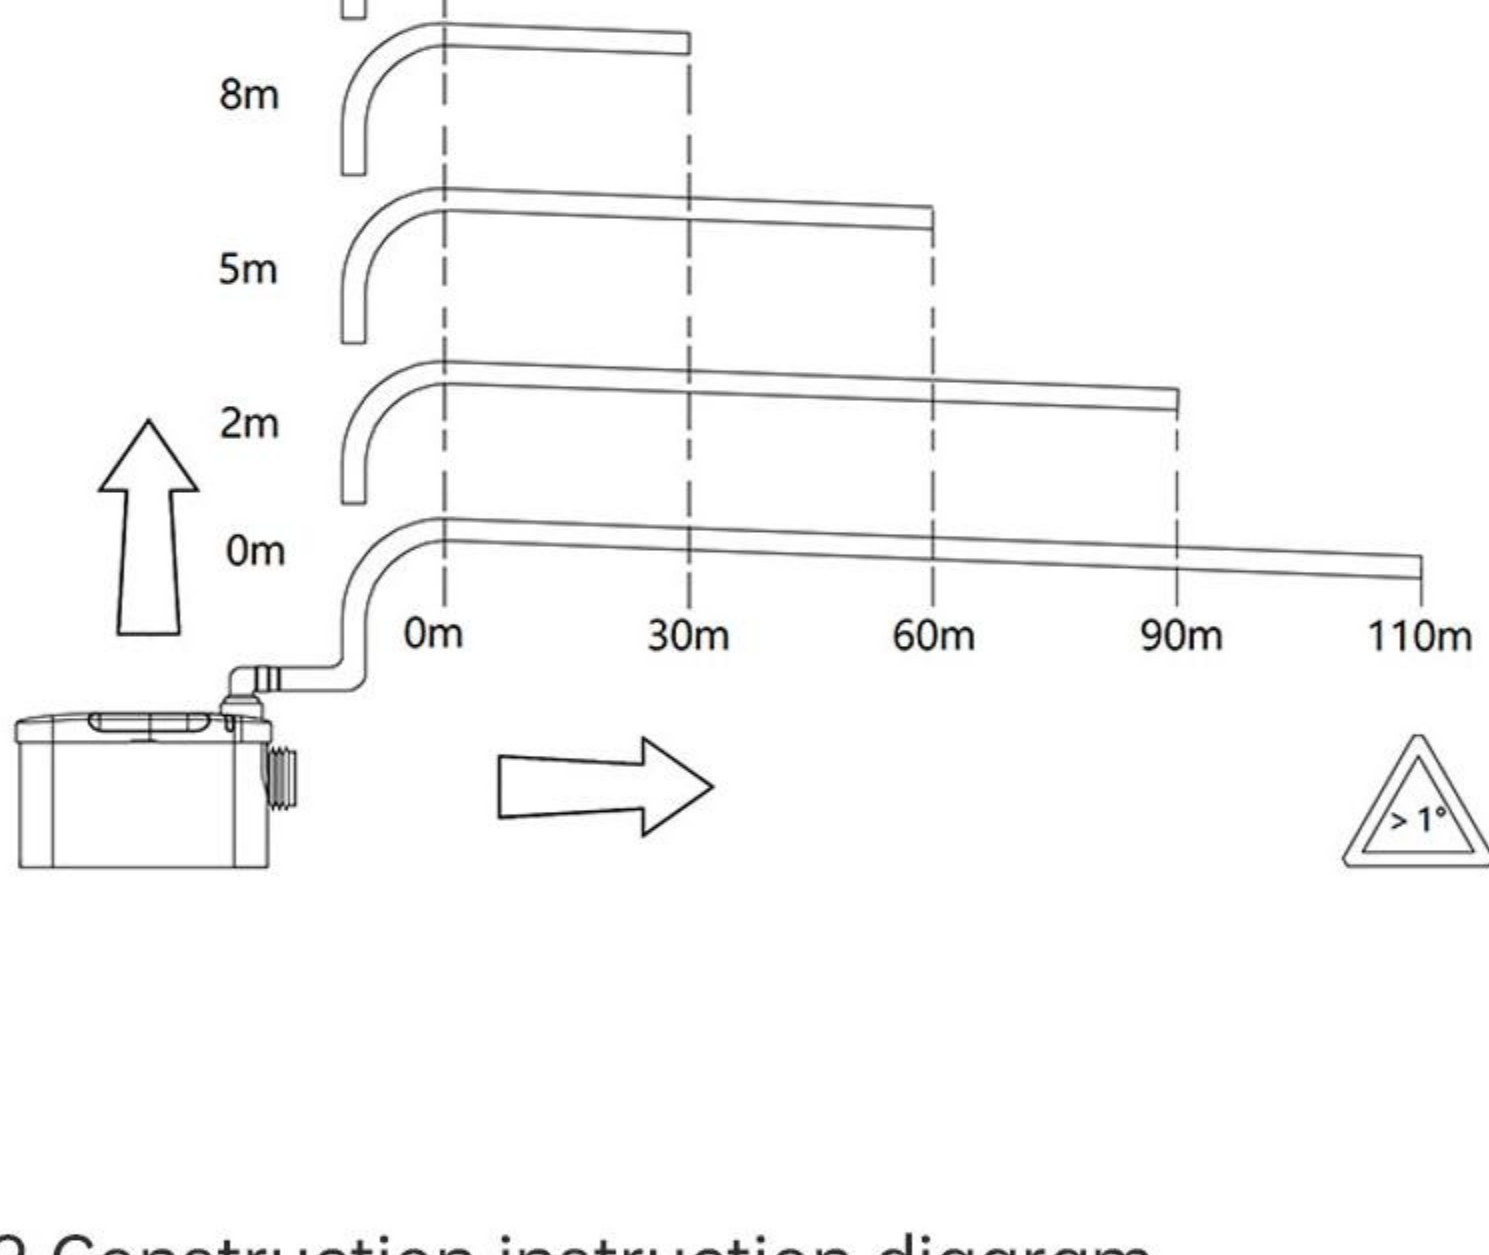

五、浴池卫生流程图

--	--

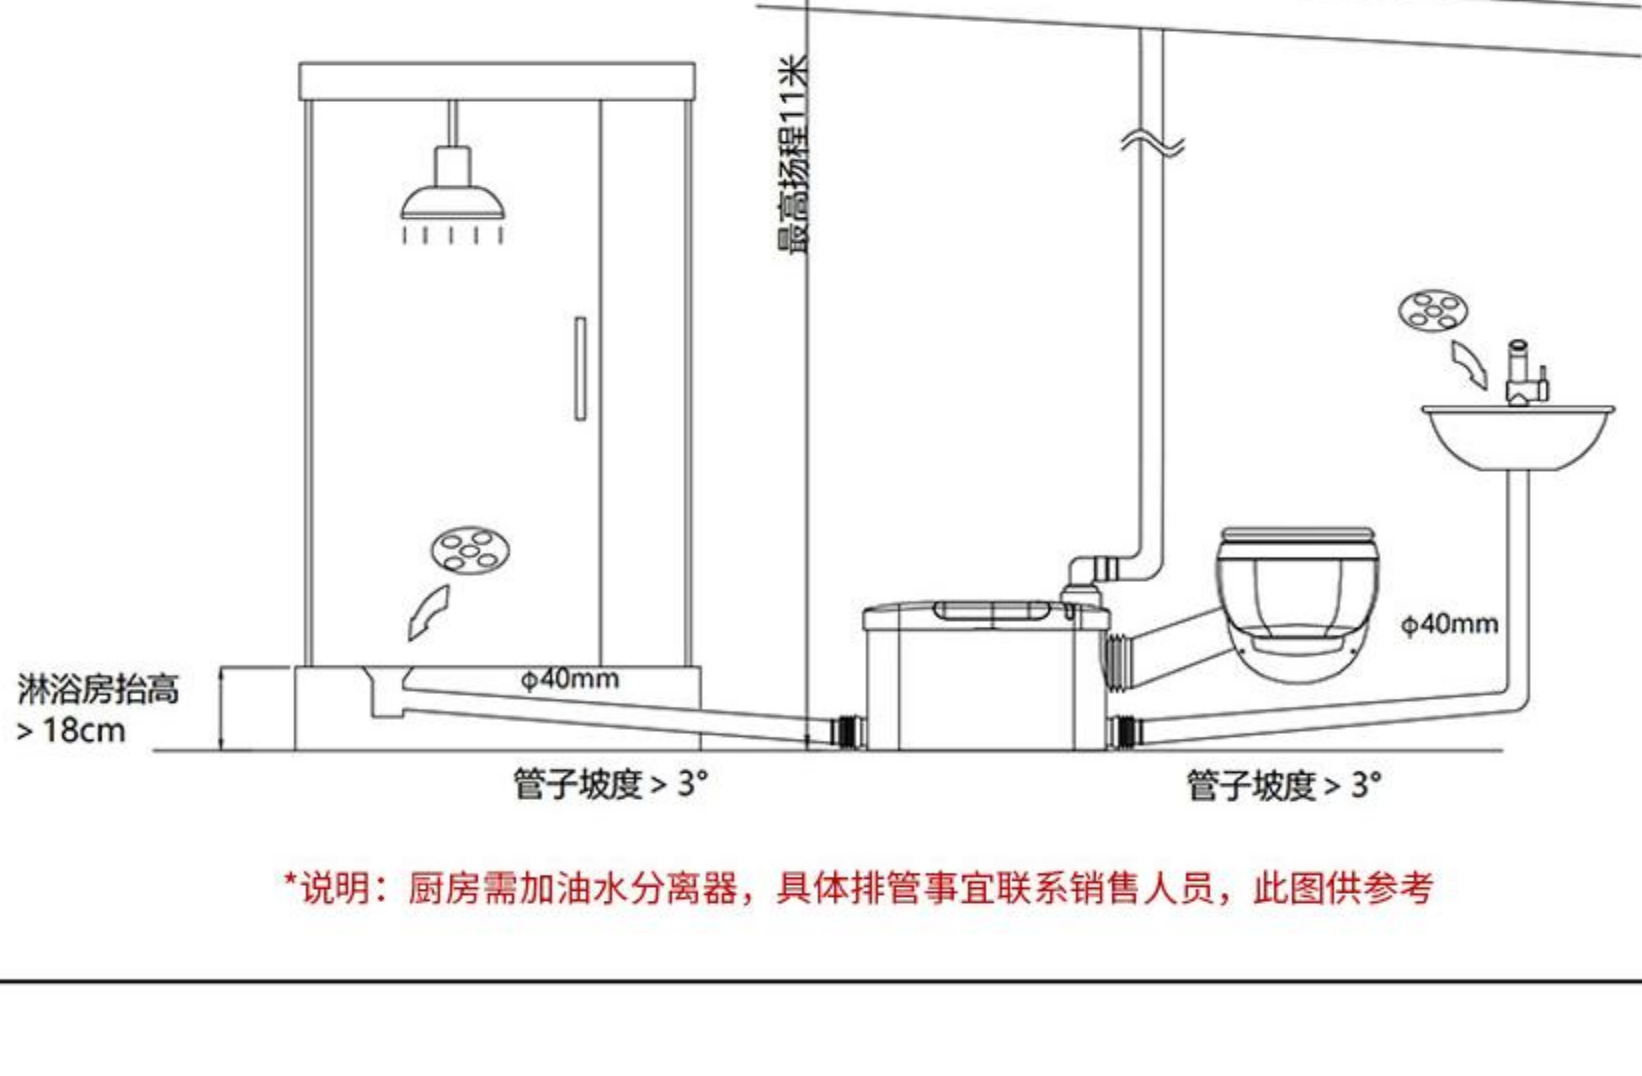


Diagram illustrating a simple circuit with a battery, a switch, and a light bulb. The switch is open, and the bulb is not lit.

