

V1 技术参数



产品参数

// _____


产品型号:	V1
额定电压:	220-240V
额定功率:	500W
启动装置:	膜压传感
最高扬程:	11m
平排建议:	110m
进水管径:	Φ40mm*3
排污管径:	Φ32mm
坐便器接口:	Φ90mm
淋浴抬高:	180mm
启动液位:	70mm
流 量:	145升/分钟
转 速:	2800转/分钟
污水温度:	1-50℃
防护等级:	主体IPX4
品质保障:	家用3年 商用24个月
产品尺寸:	512*235*342.5mm
执行标准:	T/CADBM 85-2025
可增加连接设备:	坐便器、洗手盆、小便斗、淋浴 浴缸、洗衣机、空调、厨房水槽

产品尺寸

// _____

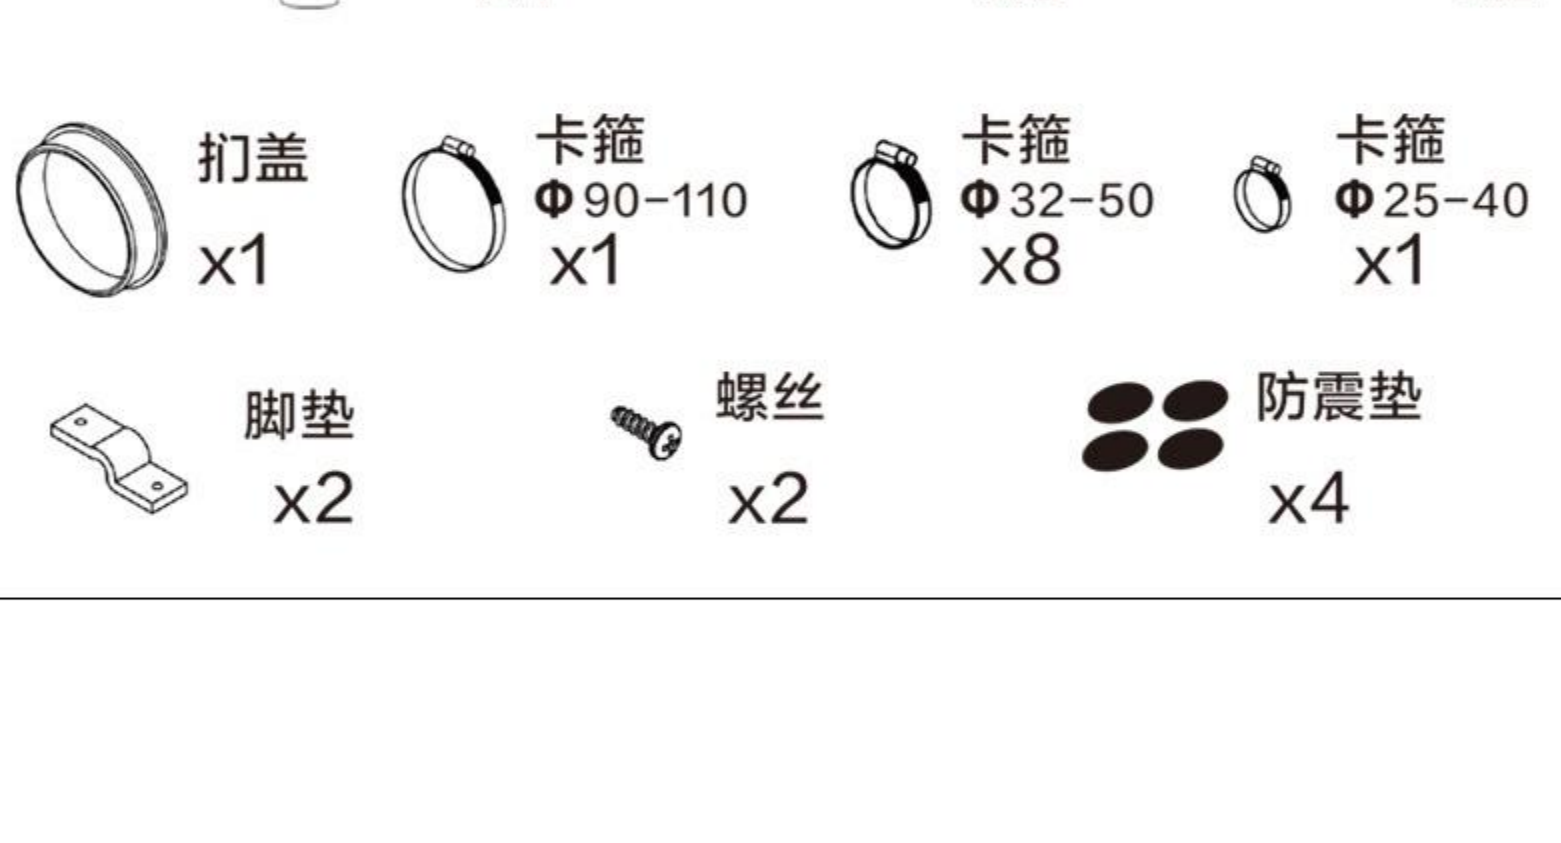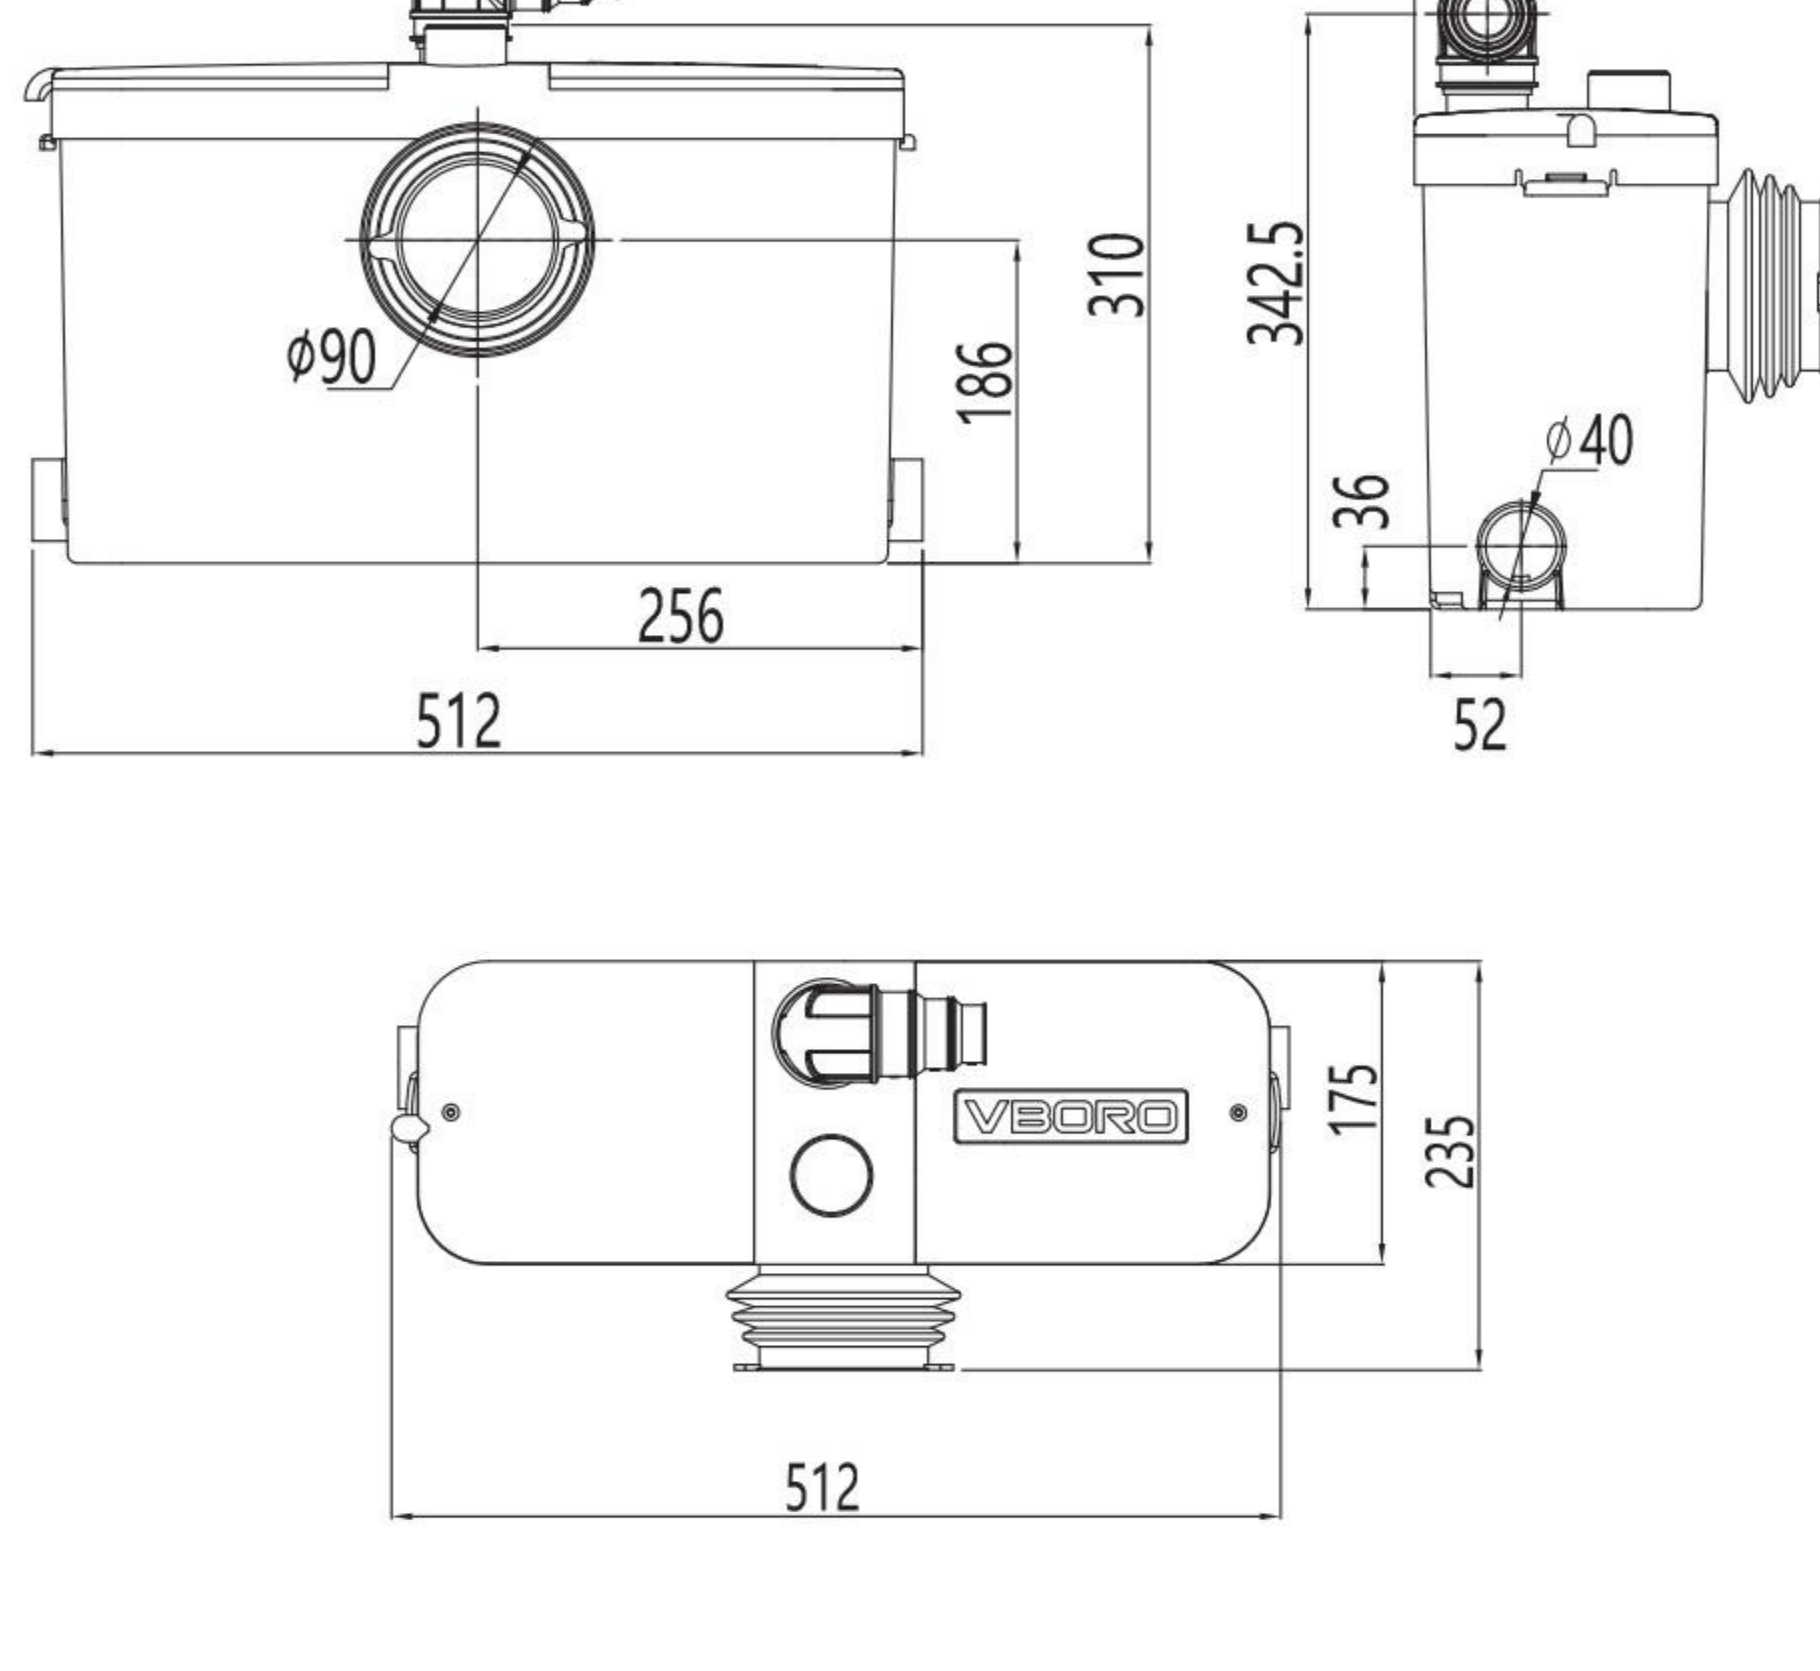



m	H(m)
0	11
1	10.8
2	10.6
3	10.4
4	10.2
5	10

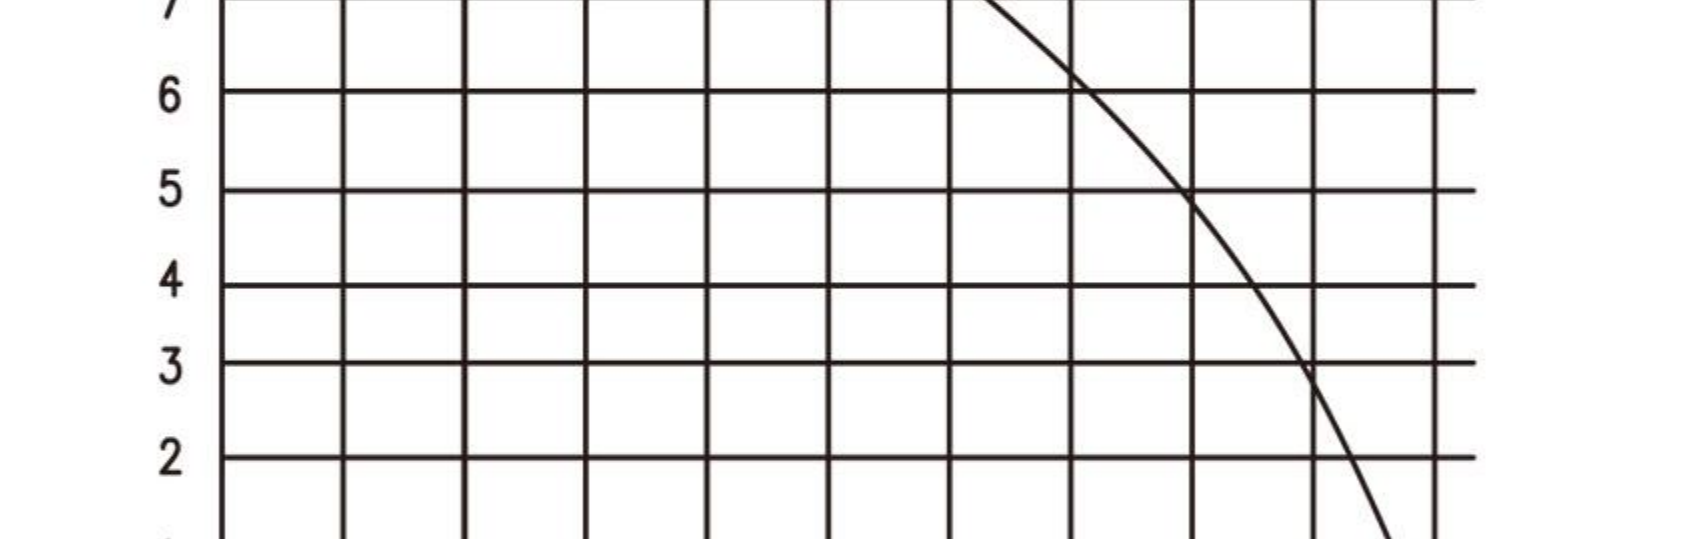

11. 1. 12.


Head diag
扬程图

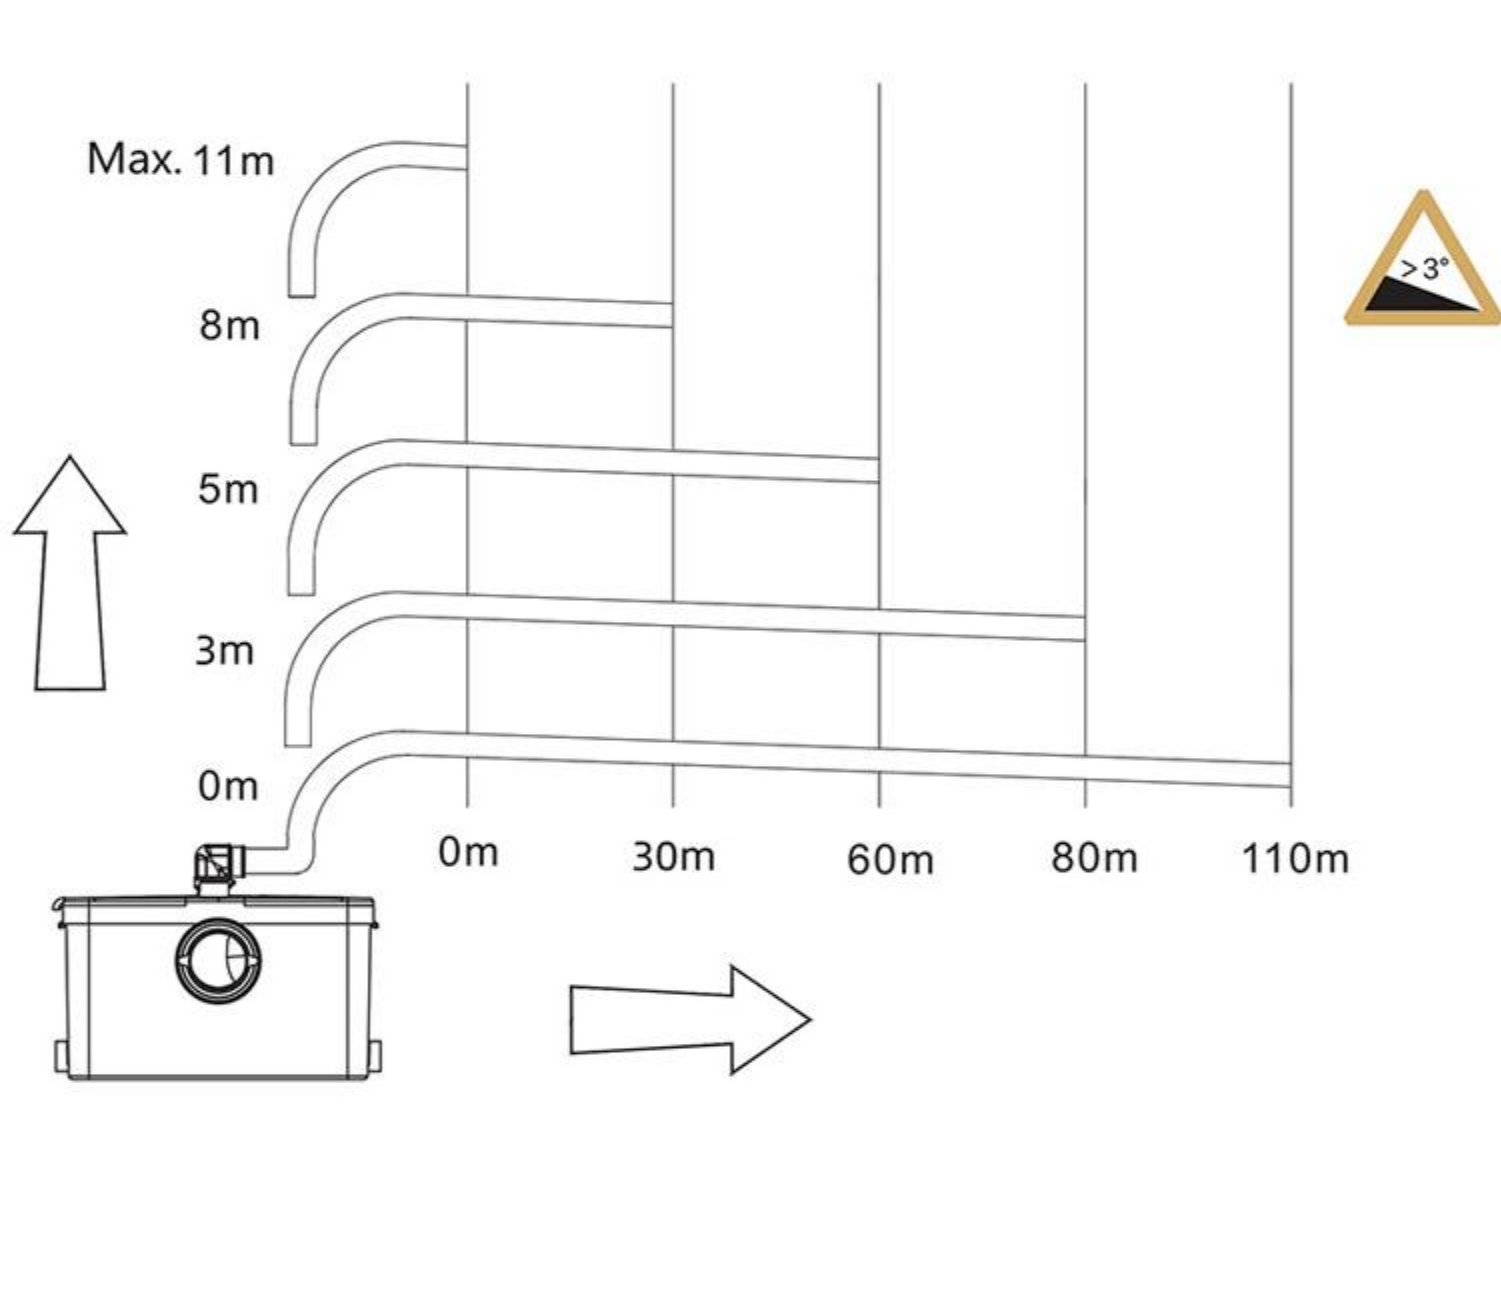

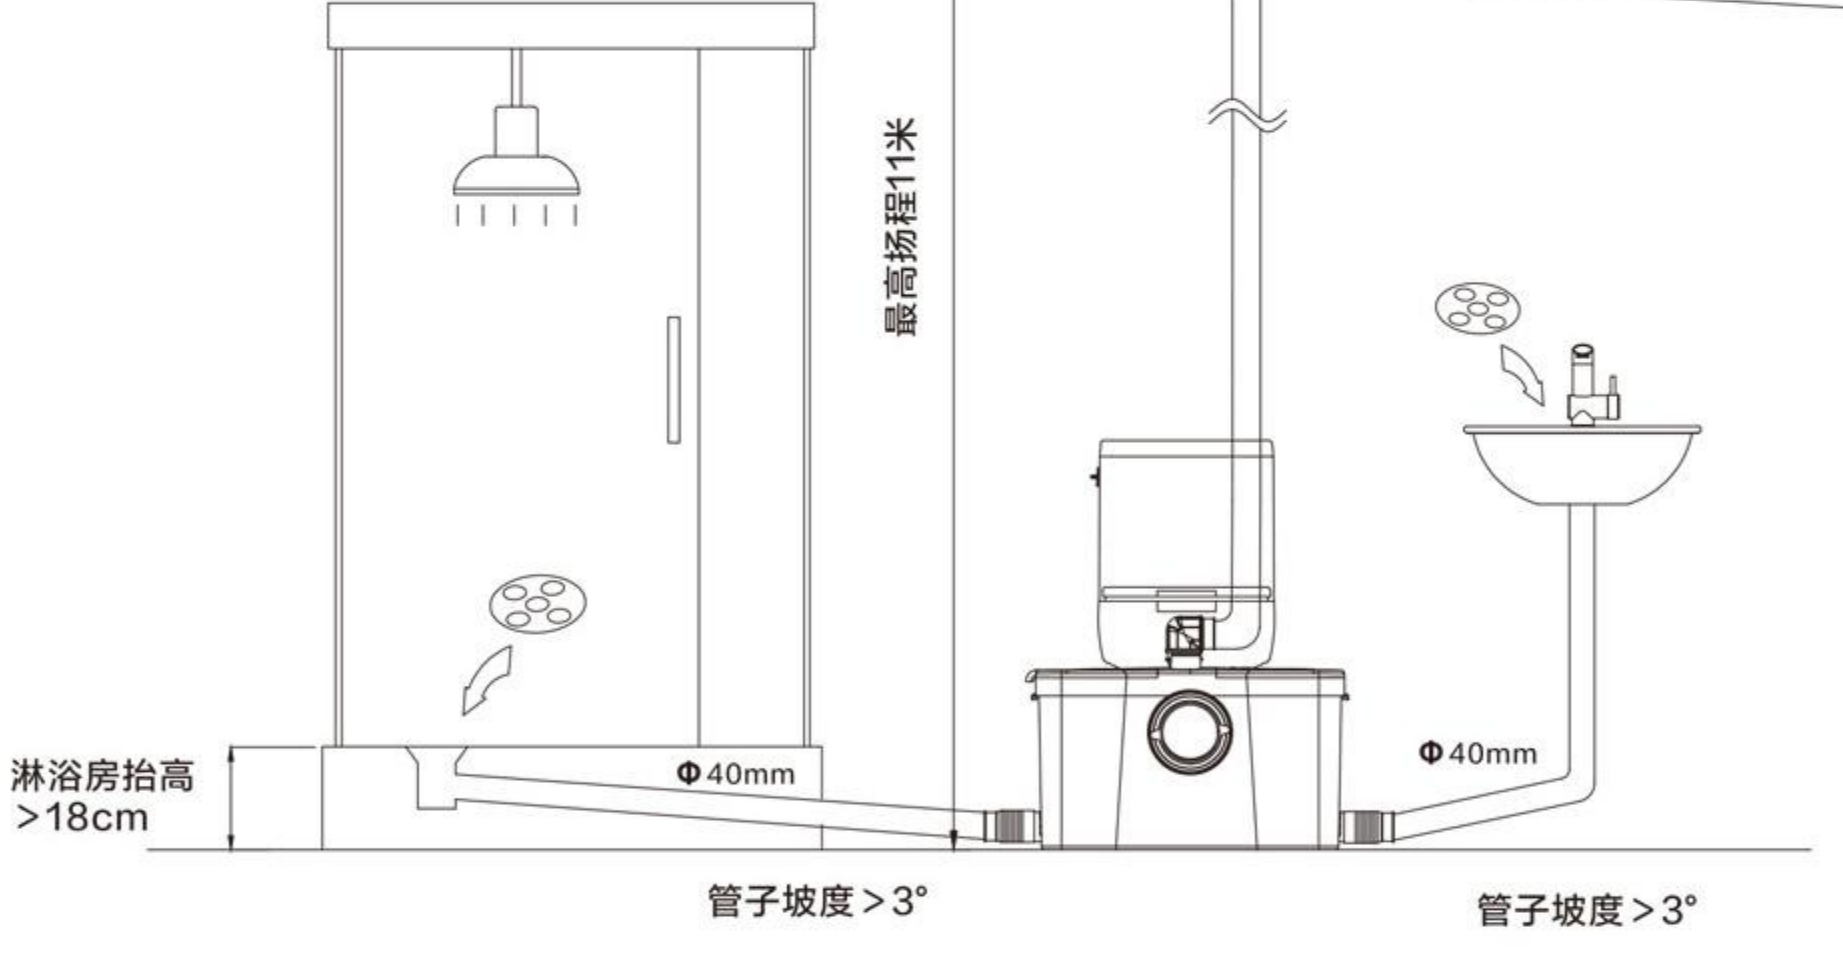

Hydroelectric positioning map

水电定位图

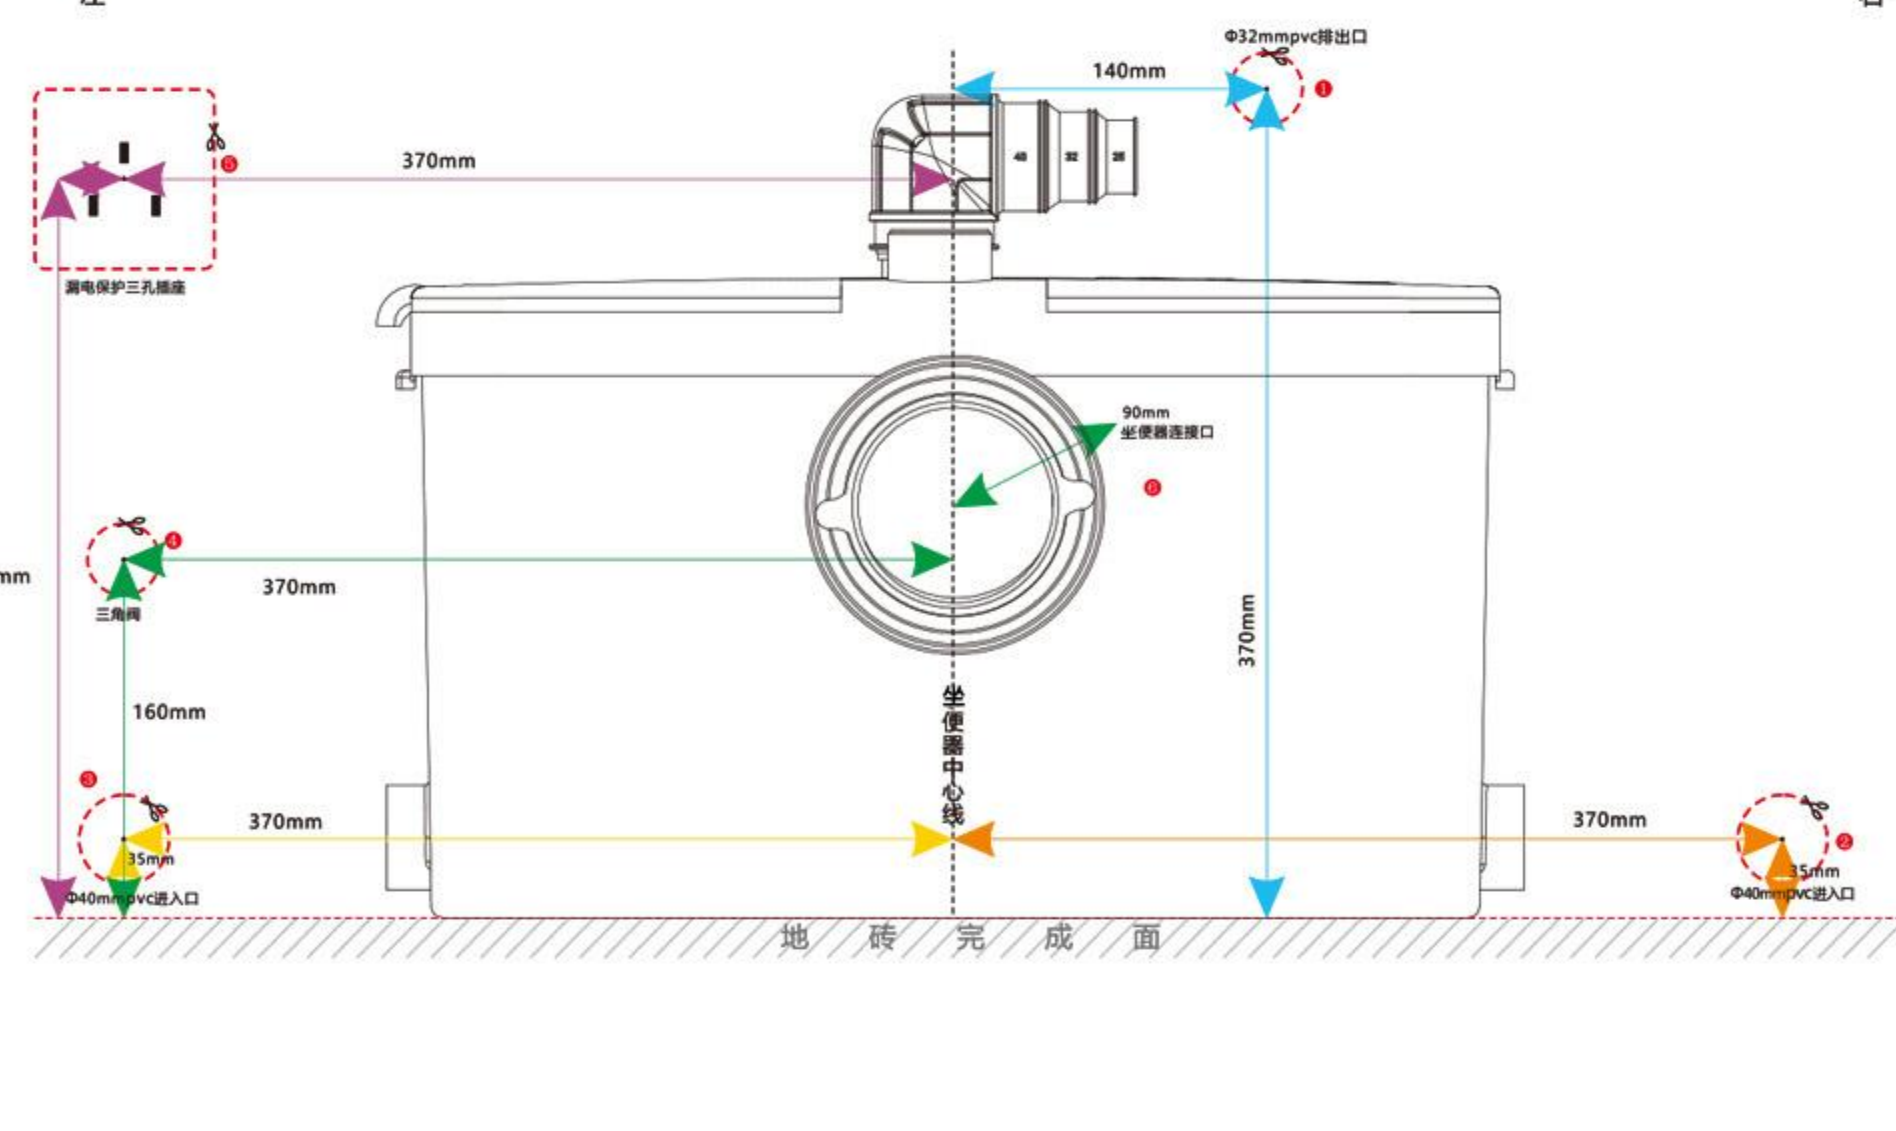

排管注意事项

// _____

